
# Leica Rugby CLA & CLH

The first upgradable lasers







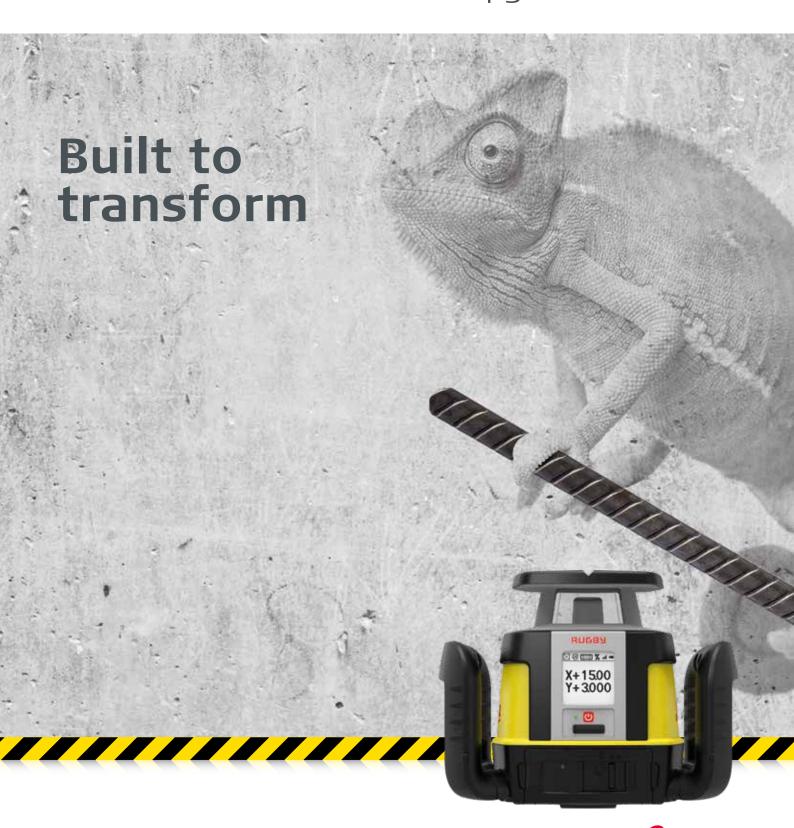



## Leica Rugby CLA

The maximum flexibility and the ability to quickly adjust to the job's needs is vital for your projects. With the Leica Rugby CLA you can get your laser upgraded to match your application needs. You pay for the functionality you need to do your job without paying for the extra features that you don't use. With additional professional services such as repair and calibration, you can secure your laser's exceptional performance for many years.

RUGBS

#### **CLA Base Model**



- Concrete and formwork levelling
- Height checking & transferring metre marks
- Land levelling

#### **CLX 250**



- Manual slopes: driveways, ramps
- Matching unknown slope (Slope catching and monitoring)

#### **CLX 500**



- Batterboard
- Formwork alignment
- Drywalls and suspended ceilings

## Covers all application needs

0.00

**(4)** 







• Fully-automatic dial-in slopes in X and Y axes: driveways, ramps, roads, parking lots

**CLX 800** 



- Land levelling
- Slopes over large distances
- Covers all applications

## Leica Rugby CLH - Simplicity at its best

Leica Rugby CLH simplicity allows effortless use of the capabilities of the laser system. It saves time by simplifying applications and making you more productive. Its robust design secures measurement stability and accuracy for your daily tasks. The handle is fixed to the base with special sockets that feature high rigidity and provide a strong mount to the base.

#### **CLA BASE MODEL**



- Concrete and formwork levelling
- Height checking & transferring metre marks
- Land levelling





- HORIZONTAL & SLOPE
- Manual slopes: driveways, ramp
- Matching unknown slope (Slope catching and monitoring)



**CLX 300** 



Dial-in slopes in X axis: driveways, ramps

**CLX 400** 



Dial-in slopes in X and Y axes: driveways, ramps

LEICA RUGBY	CLH	CLA
Warranty	5Y/2Y knockdown	5Y/2Y knockdown
Grade capability* (X/Y Axes)	8%	15%
Self-levelling accuracy**	+- 1.5 mm at 30 m (+-1/16" at 100 ft)	+- 1.5 mm at 30 m (+-1/16" at 100 ft)
Self-levelling range	+-6°	+-6°
Operating range with Combo, RE 140/160	1350 m diameter	1350 m diameter
Remote range	600 m diameter	600 m diameter
Laser class	1	2
Environmental standard	IP68/MIL-STD-810G	IP68/MIL-STD-810G
Operating temperature	-20 °C to +50 °C -4 °F to +122°F	-20 °C to +50 °C -4 °F to +122 °F
Storage temperature	-40 °C to +70 °C -40 °F to +158 °F	-40 °C to +70 °C -40 °F to +158 °F
Rotation speed	10, 15, 20 RPS	0, 2, 5, 10, 15, 20 RPS
Batteries (Li-Ion)	Li-lon	Li-lon
Battery operating time**	50 h	50 h
Battery charging	5 h (full charge) 1 h fast charge = 8 h operating	5 h (full charge) 1 h fast charge = 8 h operating
Dimensions (H × W × D)	230 mm / 9,1 in 296 mm / 11,7 in 212 mm / 8,3 in	230 mm / 9,1 in 296 mm / 11,7 in 212 mm / 8,3 in
Weight with batteries	3.8 Kg / 8,3 lbs	3.9 Kg / 8,5 lbs

LEICA COMBO (RECEIVER/REMOTE)		
Warranty	3Y/6M knockdown	
Anti-Strobe		
Working range - Receiver	1350 m / 4430 ft (diameter)	
Working range - Remote	600 m / 1969 ft (diameter)	
Detection window	120 mm /4.7 in	
Digital read out		
Offset		
Variable detection windo length		
Audio volumes		
Detection accuracy		
Environmental standard	IP67	
Batteries (li-ion) / Battery operating time**	Li-lon 3.7V / 50 h	
Battery charging	5 h (full charge) 1h fast charge = 8 h operating	
Rechargable battery / charging option with power bank		
Operating temperature	-20°C to +50°C, -4°F to +122°F	
Dimensions $(H \times W \times D)$	205 mm/8,1 in, 86 mm/3,4 in, 32 mm/1.2 in	
Weight with batteries	0.4 Kg / 0.9 lbs	
** Defined at 25°C (77°F) battery life depending upon environmental conditions. All specifications are depending on activated functionality.		





#### Site preparation

Automated machine control systems for slope and flat work.



#### Parking islands

Set the forms for parking areas to match site requirements.



## 2 Grade checking

Check grades easily and reliably.



## 5 Slopes for ramps and driveways

Dial-in or catch slope in single or dual axis.




### Parking areas

Single and dual slopes ensure proper drainage from parking areas.



## 6 Formwork verticality

Vertical alignment of forms using slope match function.

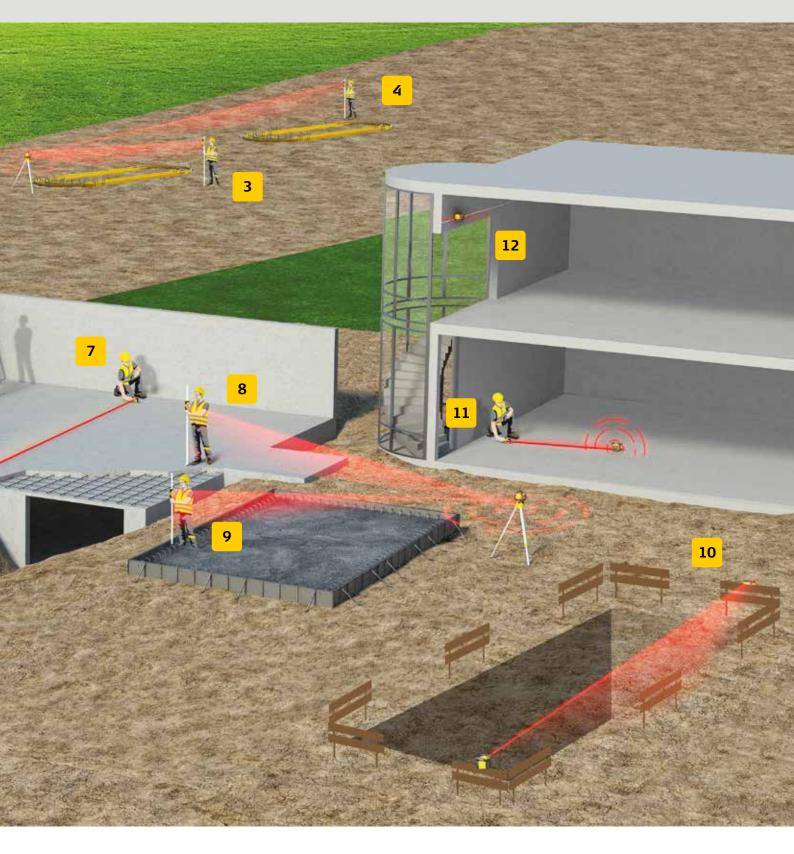



### 7 Set out walls

Align two points and mark position of wall using slope catch function.



## 10 Batter board

Align building axes using slope catch function.



## 8 Concrete levelling

Check concrete level during the pour.



## 11 Set out drywalls

Align two points and mark position of drywall using slope catch function.



## Formwork levelling

Set and level concrete forms.



## 12 Level ceiling

Check and level suspended ceiling.

#### Leica Geosystems - when it has to be right

Revolutionising the world of measurement and survey for nearly 200 years, Leica Geosystems is the industry leader in measurement and information technologies. We create complete solutions for professionals across the planet. Known for innovative product and solution development, professionals in a diverse mix of industries, such as surveying and engineering, building and heavy construction, safety and security, and power and plant trust Leica Geosystems for all their geospatial needs. With precise and accurate instruments, sophisticated software, and trusted services, Leica Geosystems delivers value every day to those shaping the future of our world.

Leica Geosystems is part of Hexagon (Nasdaq Stockholm: HEXA B; hexagon.com), a leading global provider of information technology solutions that drive productivity and quality across geospatial and industrial landscapes.



Copyright Leica Geosystems AG, 9435 Heerbrugg, Switzerland. All rights reserved. Printed in Switzerland – 2018. Leica Geosystems AG is part of Hexagon AB. 869180en – 01.18

